

BREATHE BETTER

with Air Filter Supplies




V-type ASHRAE Filter

ADVANTAGE

Extended media surface creates lower resistance to higher air flow which save your energy consumption. Large media area, up to 420 square feet, provides filters longer serving life and higher dust holding capacity. The perfect choice for your most critical environments.

APPLICATIONS

These filters are suitable for almost any application, such as PRE FILTER for power generating facilities, of FINAL FILTER for high-tech industries. HV filters can function normally in area of repeated turbulent air flow, repeated fan shutdown, desert and marine installation.

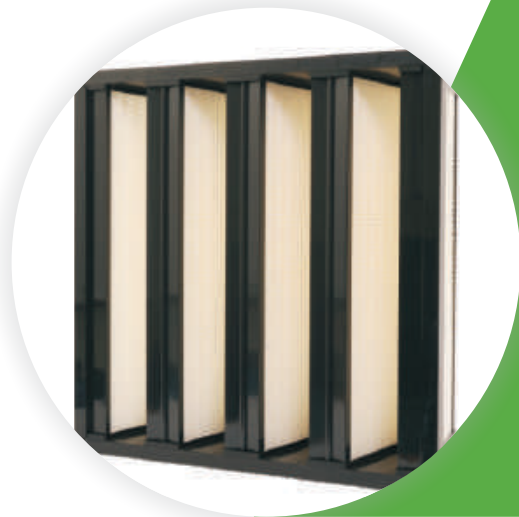

DESCRIPTION

These mini-pleated V-bank filters use glass fiber or synthetic media with efficiency in 65%, 85% and 95%. The frame can be galvanized steel, ABS or aluminum.

SPECIFICATION


- Series: V-bank Series
- Frame: ABS, aluminum, gal. sheet
- Separators: Hot melt
- Media: Glass fiber or synthetic fiber media
- Sealant: Polyurethane
- Temperature: 70°C
- Humidity: 100% RH
- Efficiency:
F6 (EN 779), 60-80% ASHRAE 52.1,
F7 (EN 779), 80-90% ASHRAE 52.1,
F8 (EN 779), 90-95% ASHRAE 52.1,
- Recommended final pressure drop: 350pa

Air Filter Supplies is committed to providing a "one-stop shop" for all of your air filtration requirements. As an air filter manufacturer, we are uniquely positioned to custom make most types of air filters.


DIMENSIONS AND PERFORMANCE DATA:

ITEM NO.	NOMINAL SIZE WxHxD(in.)	ACTUAL SIZE WxHxD(mm)	EFFICIENCY En779	AIR-FLOW/INITIAL RESISTANCE	
				CFM/W.G 100%	CMM/Pa 125%
374V65242412	24x24x12	610x610x292x4v	F6	2000/0.28 56.6/70	2500/0.41 70.8/105
375V65242412	24x24x12	610x610x292x5v		2000/0.28 56.6/70	2500/0.35 70.8/90
376V65242412	24x24x12	610x610x292x6v		2000/0.24 56.6/60	2500/0.33 70.8/85
373V65122412	12x24x12	305x610x292x3v		1000/0.24 28.3/60	1250/0.33 35.4/85
374V85242412	24x24x12	610x610x292x4v	F7	2000/0.35 56.6/90	2500/0.47 70.8/120
375V85242412	24x24x12	610x610x292x5v		2000/0.33 56.6/85	2500/0.45 70.8/115
376V85242412	24x24x12	610x610x292x6v		2000/0.31 56.6/80	2500/0.43 70.8/110
373V85122412	12x24x12	305x610x292x3v		1000/0.31 28.3/80	1250/0.43 35.4/110
374V95242412	24x24x12	610x610x292x4v	F8	2000/0.39 56.6/100	2500/0.55 70.8/140
375V95242412	24x24x12	610x610x292x5v		2000/0.37 56.6/95	2500/0.51 70.8/130
376V95242412	24x24x12	610x610x292x6v		2000/0.35 56.6/90	2500/0.49 70.8/125
373V95122412	12x24x12	305x610x292x3v		1000/0.35 28.3/90	1250/0.49 35.4/125

INITIAL RESTRICTION vs. FACE VELOCITY

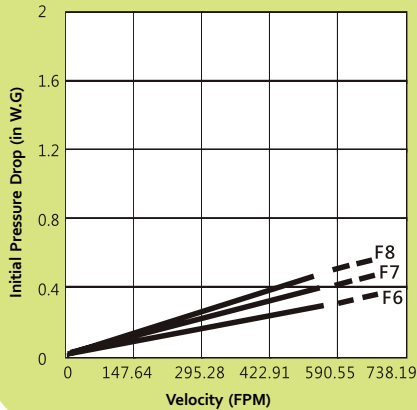

ENGINEERING DRAWING



■ 1. Extra sizes are available on request.

1300 739 563
39 CAWARRA RD, CARINGBAH, NSW 2229
EMAIL: orders@arrowsales.com.br
Website: www.tradestore.com.au



If you would like a free copy of our full catalogue, please fill in your details and fax back to (02) 9540 2899

COMPANY NAME:
PHONE:
POSTAL ADDRESS:

EMAIL ADDRESS:
CONTACT PERSON:
POSTAL CODE: